

# DS-7608NI-E2/8P/A



**HIKVISION**




The DS-7608NI-E2/8P/A is Hikvisions latest edition to the fantastically popular DS-76 range of NVRs, this updated version for 2015 has all the great features of the original DS-76 series NVR but now supports PoE+ devices with a total of 120W available via its 8 built-in PoE plug and play ports. The series now sports a new updated record rate allowing for up to 200Mbps recording (DS-7632NI/E2) and lastly now has 4CIF live view and 8 channel playback.

## FEATURES:

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- 8-ch network cameras can be connected with 80Mbps incoming bandwidth
- Up to 2 SATA interfaces
- Plug & Play with up to 8 independent PoE network interfaces
- Support network detection, including network delay, packet loss, etc
- 4 alarm inputs, 1 alarm outputs

## Dimensions

Unit: mm (inch)

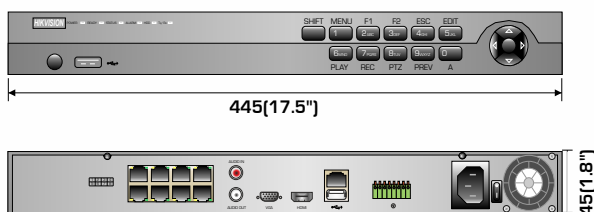

## DS-7608NI-E2/8P/A

VIDEO / AUDIO INPUT	
IP Video Input	8-ch
Two-Way Audio Input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Incoming Bandwidth	80Mbps
Outgoing Bandwidth	80Mbps
Remote Connection	128
VIDEO / AUDIO OUTPUT	
Recording Resolution	5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Frame Rate	Main Stream: 50fps Sub Stream: 50fps
HDMI / VGA Output	1-ch resolution: 1920 x 1080P / 60Hz, 1600 x 1200 / 60Hz, 1280 x 1024 / 60Hz, 1280 x 720 / 60Hz, 1024 x 768 / 60Hz
Audio Output	1-ch, RCA (Linear, 1kΩ)
Playback Resolution	5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
DECODING	
Live View/ Playback Res	5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Capability	8-ch@720P 16ch@4CIF, 12ch@720P, 6ch@1080P 6ch@1080P
HARD DISK	
SATA	2 SATA interface for 2 HDDs
Capacity	Up to 4TB capacity for each disk
EXTERNAL INTERFACE	
Network Interface	1 RJ-45 10 / 100 / 1000 Mbps self-adaptive Ethernet interface
USB interface	1 x USB 2.0 and 1 x USB 3.0
Alarm in/out	4/1
POE	
Interface	8 independent 100Mbps PoE network interface
Max Power	120W
Supported Standard	AF and AT
GENERAL	
Power Supply	220V DC
Consumption	≤ 10W (without hard disk and PoE)
Working Temperature	-10°C ~ +55°C
Working Humidity	10% ~ 90%
Chassis	1U chassis
Dimensions (WxHxD)	445 x 45 x 290mm (17.5" x 1.8" x 11.4")
Weight	≤ 1 Kg (without hard disk)

**HIKVISION**