

iVMS-4200 Lite Client Software

iVMS-4200 Lite is an abbreviated version of iVMS-4200. It provides basic video surveillance functions including real-time live view, video recording, and remote playback for the connected devices (such as DVRs, NVRs, network cameras, network speed domes, encoders, etc.). It meets the needs of small-sized projects, such as a small-sized supermarket, an apartment, etc.

Main Features

Live View

- View settings and instant playback
- Live view on main/auxiliary screen
- Up to 64-window division for standard screen, and 48-window division for the wide screen
- Custom window division configurable
- Resuming the latest live view status after client restart
- Customizing the displayed icons on the live view toolbar and adjusting icons order

PTZ Control

- Remote PTZ control
- Configuring and operating preset, patrol, and pattern

Playback

- Dual-stream playback (it should be supported by the device)
- Synchronous playback by default, and up to 16 cameras can be played back synchronously
- Optimizing searching recorded video files to make it quicker and more convenient
- Supports playback in 16x speed
- Clipping the recorded video files
- Downloading video files for multiple cameras synchronously

Network

- Searching the active online devices
- Upgrading device online
- Adding devices by IP address, domain name, and Cloud P2P domain



- Two-way audio and broadcast function
- Alarm output control

General

- Applied in local area network and wide area network (Cloud P2P)
- H.264, H.264+, H.265, and H.265+ video encoding formats
- Resetting device password
- Hardware decoding for live view and playback

Specifications

Model	iVMS-4200 Lite
Database	SQLite
Supported Language	Bulgarian, Croatian, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Serbian, Simplified Chinese, Slovak, Slovenian, Spanish, Swedish, Thai, Traditional Chinese, Turkish, Vietnamese
Device	Supports up to 64 devices (encoding devices and Cloud P2P devices)
Channel	Supports up to 256 channels
Live View	Supports up to 64-ch live view simultaneously
Auxiliary Screen Preview	Supports up to 4 auxiliary screens for live view
Playback	Supports up to 16-ch synchronous playback
Download	Supports up to 16 downloading tasks simultaneously

Client Requirements

Features		Requirements
Minimum	Processor	Intel® Core™ i5-4590 @ 3.30 GHz
	Memory	8 GB of RAM
	Operating System	Microsoft® Windows 7 (64-bit)
	Video Card	NVIDIA® GeForce GTX 970
Recommended	Processor	Intel® Xeon® E3-1226 V3 @ 3.30GHz
	Memory	8 GB of RAM
	Operating System	Microsoft® Windows 7 (64-bit)
	Video Card	Intel® HD Graphics P4600
High Performance	Processor	Intel® Core™ i7-6700K @ 4GHz
	Memory	16 GB of RAM
	Operating System	Microsoft® Windows 7 (64-bit)
	Video Card	NVIDIA® GeForce GTX 1070

Live View Performance

Performance under Different Client Requirements (Software Decoding)

Encoding Format	Resolution	Bit Rate (Mbps)	Frame Rate (fps)	Maximum Number of Cameras Viewed Simultaneously		
				Minimum	Recommended	High Performance
H.264	720p	3	30	27	25	42
	1080p	6	30	13	12	20
	3 MP	8	30	9	9	14
	8 MP	16	30	3	2	5
H.264+	720p	1	30	33	29	65
	1080p	3	30	18	14	29
	3 MP	4	30	10	9	18
H.265	720p	1	30	26	24	41
	1080p	3	30	10	9	16
	3 MP	4	30	6	6	11
H.265+	720p	0.5	30	29	26	45
	1080p	1	30	13	11	21
	3 MP	2	30	8	7	14


Performance under Different Client Requirements (Hardware Decoding)

Encoding Format	Resolution	Bit Rate (Mbps)	Frame Rate (fps)	Maximum Number of Cameras Viewed Simultaneously	
				Recommended	High Performance
H.264	1080p	6	30	25	25
	8 MP	16	30	6	6
H.264+	720p	1	30	45	45
	1080p	3	30	24	23
	3 MP	4	30	19	17
H.265	720p	1	30	N/A	45
	1080p	3	30	N/A	23
	3 MP	4	30	N/A	15
H.265+	720p	0.5	30	N/A	45
	1080p	1	30	N/A	22
	3 MP	2	30	N/A	15

* For the field of N/A, the video card under the recommended system requirement does not support H.265 or H.265+.

* The above parameters are for reference only. Under the same resolution and frame rate, the bit rate of cameras from different manufacturers may be different. Moreover, the decoding performance from different manufacturers may also be different.

Typical Applications

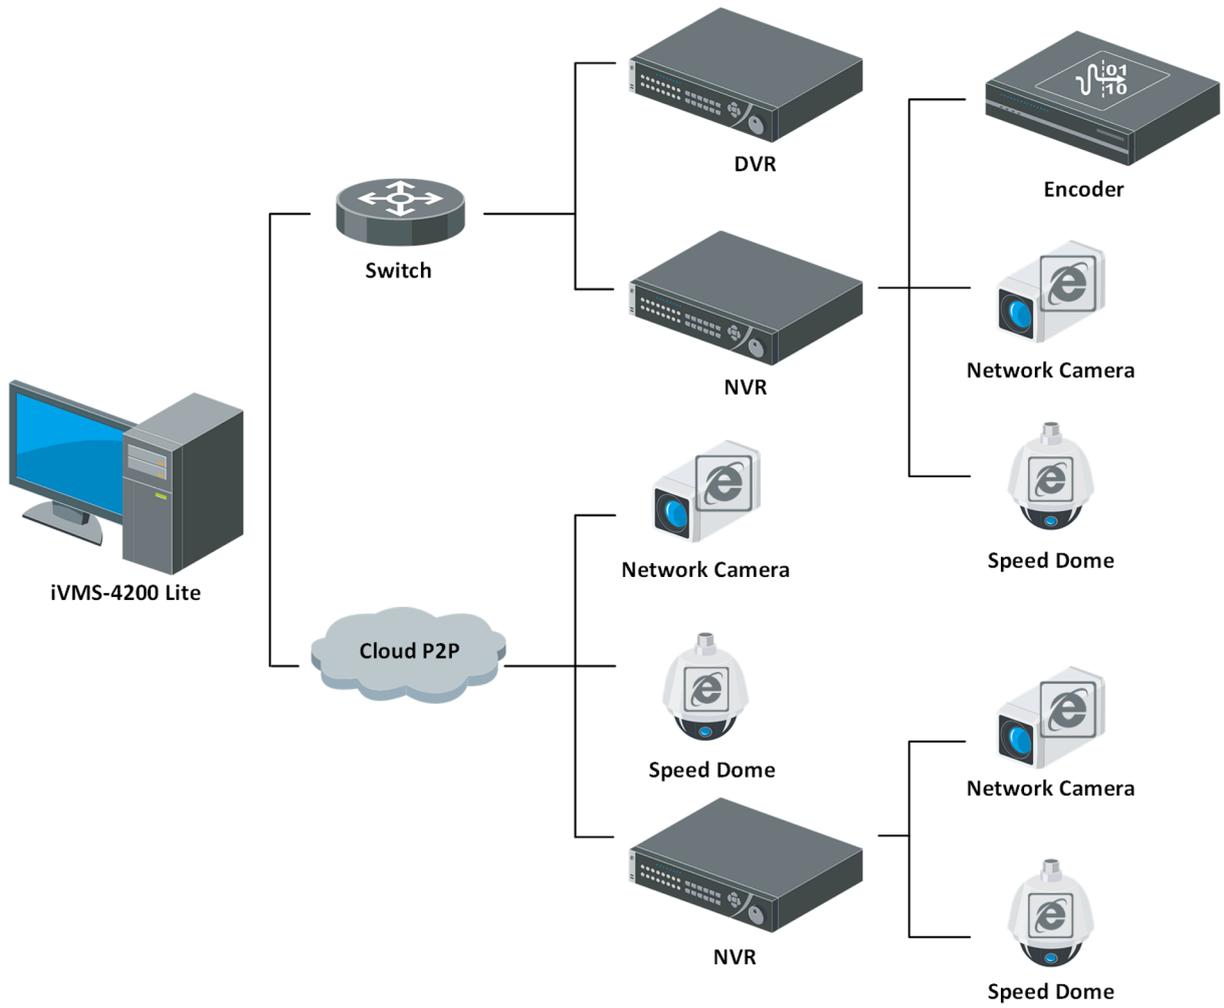

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com